




We've Made a Change!

Your vehicle includes new screws to fasten the sport bar to the vehicle. Please use these instructions instead of the instructions for this assembly step in the Owner's Manual.

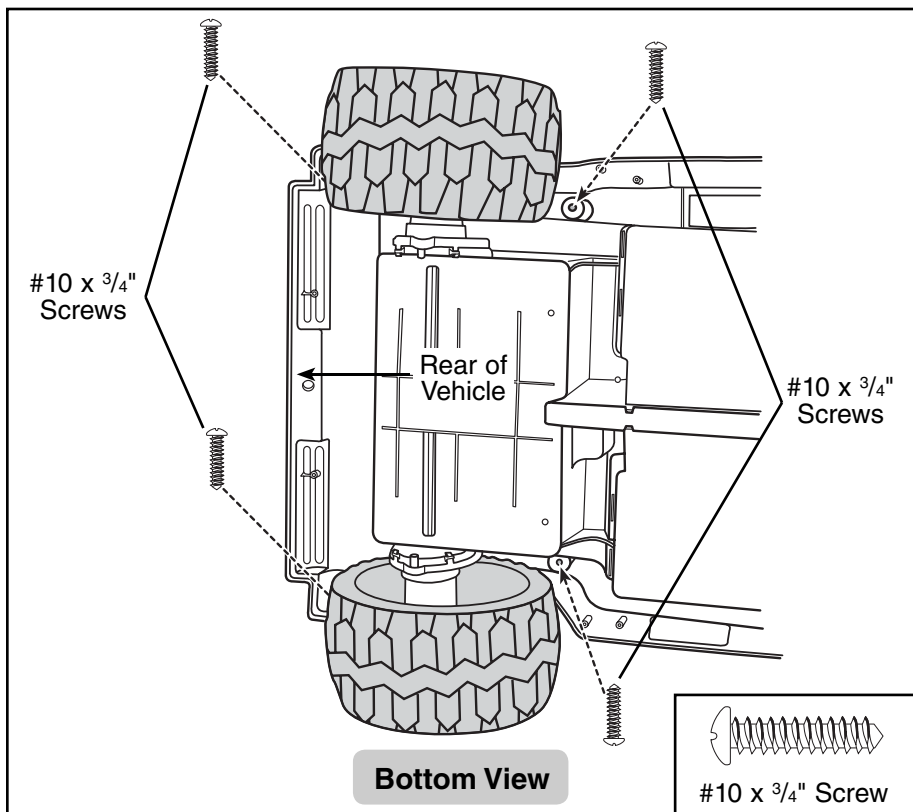

- Turn the vehicle on its side.
- Insert two #10 x $\frac{3}{4}$ " screws into the holes **(behind the rear wheels)** in the underside of each rear wheel well, through the vehicle and into the ends of the sport bar. Tighten the screws with a Phillips screwdriver. Do not over-tighten.
- Next, insert the two #10 x $\frac{3}{4}$ " screws into the holes **(in front of the rear wheels)** in the underside of each wheel well, through the vehicle and into the ends of the sport bar. Tighten the screws with a Phillips screwdriver. Do not over-tighten.

©2005 Mattel, Inc. All Rights Reserved. ® and ™ are registered trademarks of Mattel Inc.
Fisher-Price, Inc., a subsidiary of Mattel, Inc., East Aurora, New York 14052 U.S.A.